

iGLO LED Tube Series - 22W, 4ft

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



Features

- ETL, cULus, FCC, DLC certificate
- 4ft, T8 Tube; Al. + PC tube with Frosted or Clear Lens
- 160° lighting, high CRI.
- input voltage AC100-277V
- Energy saving up to 70%
- Eco-Friendly, no UV or IR radiation, mercury free
- Easy Installation.
- Lifespan: 50,000 hours
- Warranty 3 Years




Frosted Lens

Clear Lens

Applications

Warehouse, Garages, Factory Lighting,
Homes, Offices, Hotels, Hospitals,
Schools, Cafeterias, Grocery
& Shopping Centers, etc.

***DLC Certificate only for the Clear Lens**

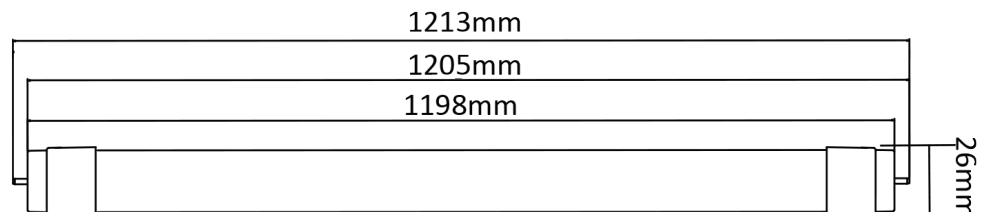

PRODUCT SPECIFICATIONS

iGLO LED T8 Tube Series:	GL22WT8FZNH5000KUDX1.2MX	GL22WT8ZNH5000KUDX1.2MF
Wattage:	22W	
Lumens:	3444 LM	2860 LM
CCT:	5000K	
Input Voltage:	90-277VAC, 50/60Hz	
Power Factor:	≥0.90	
Efficacy:	138.42 lm/w	130 lm/w
CRI:	>83	>80
THD:	≤20%	
Dimmable:	No	
Dimensions:	4 ft, T8	
Projected Hours (Life Span):	50,000 Hours	
Beam Angle:	160°	
Base:	G13	
Operating Temperature:	-20°C to 40°C	
Housing:	Aluminum & Plastic	
Cover/Lens Type:	Clear	Frosted
Waterproof Rating:	IP20	
Certificates:	ETL, cULus, FCC, DLC	ETL, cULus, FCC
Warranty:	3 Years	



Box Size	Qty/Carton	Net Weight	Gross Weight
1310*235*240 mm	25 pcs	0.32 kg/PCS	10 kg/CTN

iGLO LED Tube Series - 22W, 4ft

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



WIRING DIAGRAMS

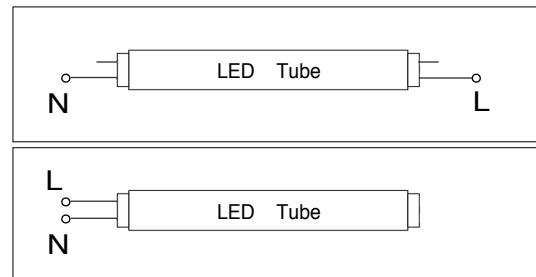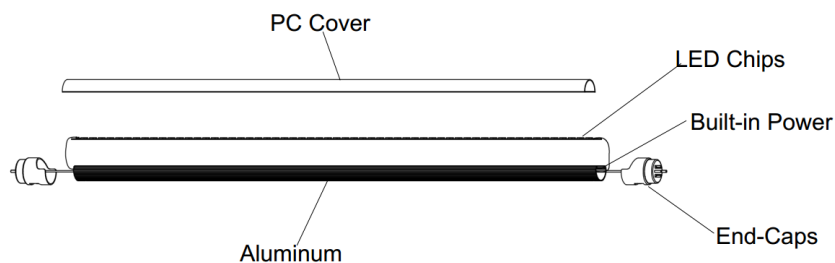


INSTALLATION INSTRUCTION

● Installation:

1. Please read the instructions before installation.
2. Please cut off the power supply before installation.
3. Choose the lamp holder according to the specification of lamp, please make sure the working voltage is the same as the working voltage signed on the LED tube light.
4. Please supply the power according the schematic of LED tube light(as follow ,choose anyone).
5. Please supply the power after make sure the working voltage is normal ,lamp holder install well.

● Supply power schematic of LED tube light

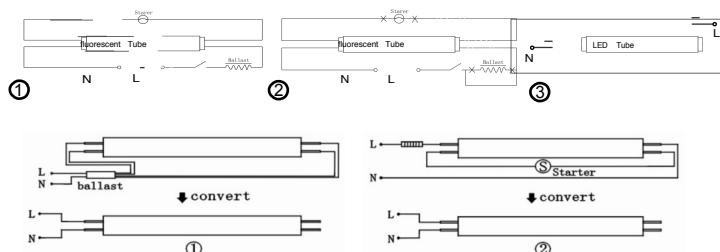

● Attention:

1. Please connect the power supply according the supply power schematic of LED tube light.
2. Indoor use only, non-waterproof.
3. Please do not open the tube light in order to ensure the lifetime of tube light and safety.
4. Please supply the power after check the holder install well, connect circuit is normal and working voltage is the same as the signed working voltage on LED tube light.
5. Please do not touch the tube light after supply the power.
6. Please remove the ballast(include electronic and inductive)and starter when replace the traditional tube light, make sure the advantage of tube light,like stability, environmental and energy saving, supply the power as the supply power schematic of LED tube light.

WARNING:

1. DISCONNECT POWER BEFORE INSTALLATION, MUST OPERATED BY ELECTRICIAN
2. TAKE OUT THE TUBE. BEFORE INSTALLATION PLEASE CHECK IF THERE IS ANY UNSATISFACTORY CONDITION OF THE TUBE, SUCH AS WHETHER THE APPEARANCE IS DAMAGED OR DEFORMED, OR THE ACCESSORIES ARE COMPLETE OR NOT.
3. PLEASE USE IT UNDER CORRECT INPUT POWER RANGE
4. THIS TUBE IS NON-DIMMABLE
5. NOT FOR OUTDOOR OR SOME WHERE BE EXPOSED TO RAIN(WATERPROOF TYPE AVAILABLE)
6. IF THE LIGHTS DON'T WORK PROPERLY, PLEASE CHECK THE CONNECTIONS AFTER TURNING OFF THE POWER
7. USE UL APPROVED 3-PIN PLUG.