




95
Cu to Cu Only

c UL us LISTED

GROUNDING CONNECTORS

Specifically designed for making positive ground connections, GreenGard™ connectors feature the same live-action as GB® WingGard® connectors with the added plating protection for corrosion resistance in grounding applications.

- Easier to use — New design enables torque-up with improved grip, contoured, offset wings and firm ground connections.
- Connectors have a hole in the tip for ground wire.



Part #	Color	Pack Qty.	Wire Range	Min	Max
19-095	Green	6/Clam	#14 - #10 AWG	2 #14	4 #12
25-095	Green	25/Bag	#14 - #10 AWG	2 #14	4 #12
10-095	Green	100/Box	#14 - #10 AWG	2 #14	4 #12
13-095	Green	500/Bag	#14 - #10 AWG	2 #14	4 #12
12-095BX	Green	26000/Box	#14 - #10 AWG	2 #14	4 #12

Dimensions

	A	B	C	D	E
95 (Green)	1 1/4"	5/16"	9/32"	7/16"	29/32"



GB-4 Black GB-3 Black


Cu to Cu Only

c UL us LISTED

HI-TEMP CONNECTORS

Connectors manufactured with high-temperature-rated plastic to withstand extreme temperatures.

- Temperature-rated to 150 °C (302 °F).
- Available in two standard models.



Part #	Color	Pack Qty.	Wire Range	Min	Max
19-003HT	Black	10/Clam	#20 - #14 AWG	3 #20	2 #14 + 3 #20
10-003HT	Black	100/Box	#20 - #14 AWG	3 #20	2 #14 + 3 #20
27-003	Black	10000/Box	#20 - #14 AWG	3 #20	2 #14 + 3 #20
19-004HT	Black	10/Clam	#18 - #10 AWG	1 #14 + 1 #18	4 #14 + 1 #18
10-004HT	Black	100/Box	#18 - #10 AWG	1 #14 + 1 #18	4 #14 + 1 #18
27-004	Black	10000/Box	#18 - #10 AWG	1 #14 + 1 #18	4 #14 + 1 #18

Dimensions

	A	B	C	D	E
GB-3 Black	11/32"	27/32"	7/16"	3/16"	11/32"
GB-4 Black	9/32"	15/16"	17/32"	7/32"	7/16"



20-089 & 20-090

Cu to Cu Only


c UL us LISTED

SPECIALTY CONNECTORS

CLOSED END CONNECTORS

Crimp connector designed for use with solid or stranded wire.

- Vibration, Corrosion, and Chemical resistant.
- Tin-plated seamless copper.

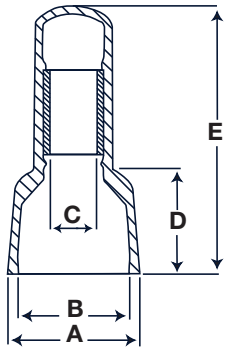

Part #	Color	Pack Qty.	Wire Range	Min	Max
20-089	White	10/Clam	#22 - #14 AWG	2 #22	1 #14 + 1 #18
20-090	White	10/Clam	#22 - #10 AWG	3 #18	1 #10 + 1 #20
15-090	White	15/Clam	#22 - #10 AWG	3 #18	1 #10 + 1 #20

Dimensions

	A	B	C	D	E
20-089	11/32"	1/4"	5/32"	15/64"	9/16"
20-090	31/64"	13/32"	11/64"	25/64"	63/64"