


NEMA Locking Devices


Locking Devices for the Entire Spectrum of Industrial Applications

Leviton's industrial grade locking devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of locking devices of unmatched flexibility and dependability.

Exposed Connector

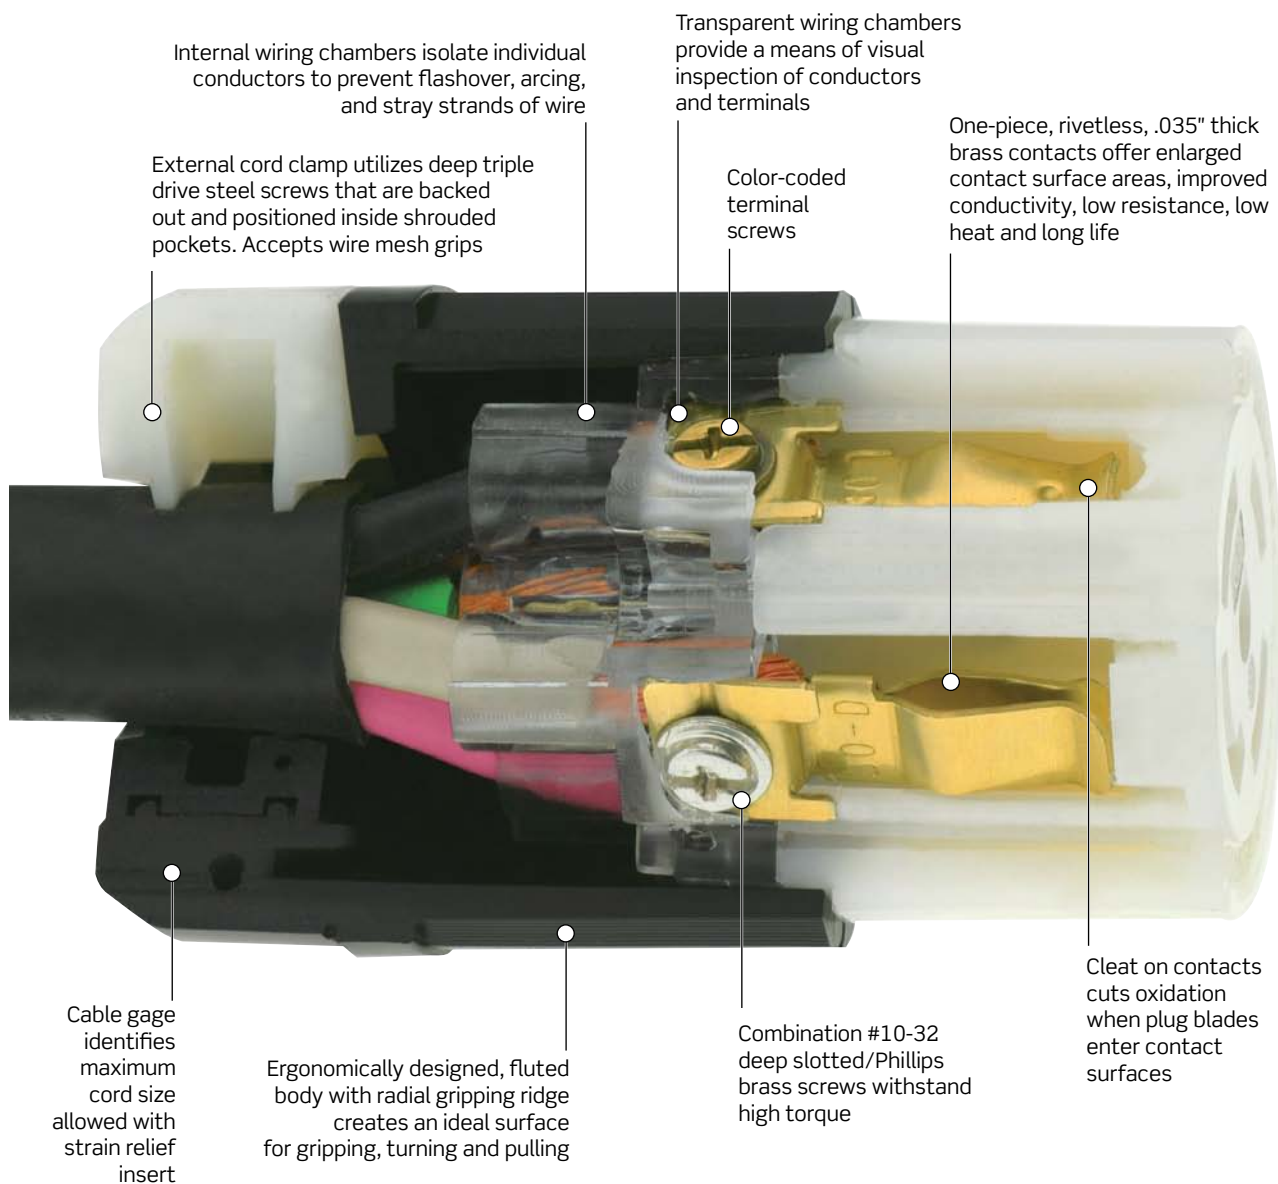

Exposed Plug

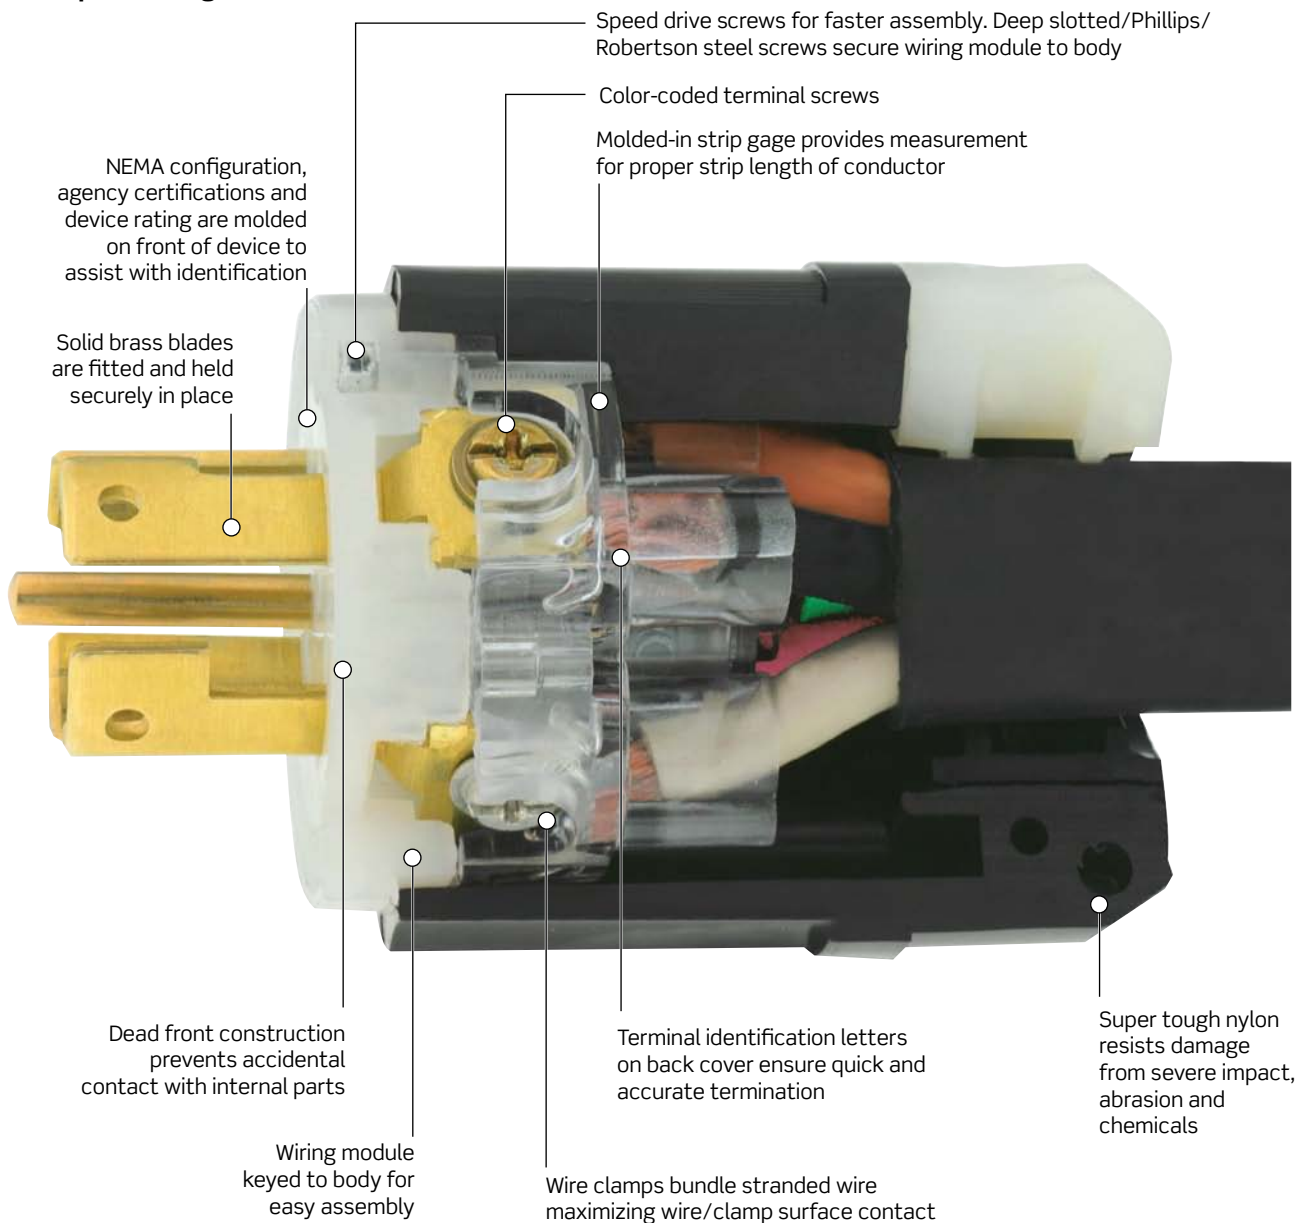

Shrouded pockets in cord clamp prevents slippage of screwdriver blade when tightening clamp screws.



Wire clamps move within individual chambers to provide positive clamp lock without cutting wire strands.



Captive terminal screws eliminate nuisance dropping and searching for missing screws.




Deep-funnelled, large wire wells guide conductors into termination position.

Locking Flush Receptacles

Engineered for maximum performance with a UL 94 V-0 flammability rating.

V-CO-MAX®

Sample
Receptacles

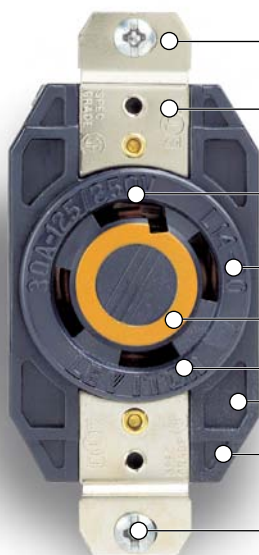

Extra thick .050" nickel-plated brass mounting strap

Stamped-in agency certifications

Molded-in amperage and voltage rating

NEMA configuration


Color-coded voltage rating

Manufacturer

Stability ribs

Uni-body face

Triple combination head mounting screws

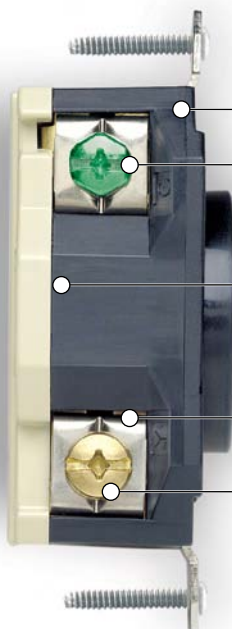

Molded-in terminal identification letters

Triple combination mounting screws, multi-terminated design, accepts #8 to #14 solid or stranded conductors

Seam between front cover and back cover is far from contact working area

External nickel plated clamps accept #8 to #14 solid or stranded conductors for back and side wiring

Oversized #10 brass Phillips/Robertson/straight slot drive terminal screw



V-CO-MAX®
FLUSH RECEPTACLES-UL V-0 RATING

Color-Coded Voltage Ratings

		
125V	250V	277VAC
		
125/250V	3ø250V	3ø480V
		
		600V

One-piece .040" thick brass, high-copper content contacts with nickel-plated clamp type terminals

Contacts deeply seated in thick walled faced



Mechanically-secured all-brass ground path

30A NEMA Locking Devices

Black & White® | Industrial



Industrial Grade Black & White® Locking Blade Devices

30A-125/250V and 3Ø 250V

3-Pole, 4-Wire Grounding  					
Rating	30A-125/250V		30A-3Ø 250V		
NEMA					
	L14-30P	L14-30R	L15-30P	L15-30R	
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	Plug	Connector	
Black & White® Nylon Body	2711	2713	2721	2723	
All Black	2711-B	2713-B	2721-B	2723-B	
Yellow Nylon Body	—	2713-CY	—	—	
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	
Flanged Device	2715	2716	2725	2726	
Receptacles					
V-O-MAX® Single Flush Receptacle	—	2710	—	2720	
V-O-MAX® Single Flush Receptacle, Isolated Ground	—	2710-IG	—	2720-IG	
All Black Flush Mount Locking Receptacle	—	2710-B	—	—	



2711



2710

30A-3Ø 480VAC and 3Ø 600VAC

3-Pole, 4-Wire Grounding  					
Rating	30A-3Ø 480VAC		30A-3Ø 600VAC		
NEMA					
	L16-30P	L16-30R	L17-30P	L17-30R	
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	Plug	Connector	
Black & White® Nylon Body	2731	2733	2741	2743	
All Black	2731-B	2733-B	—	—	
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	
Flanged Device	2735	2736	2745	2746	
Receptacles					
V-O-MAX® Single Flush Receptacle	—	2730	—	2740	
V-O-MAX® Single Flush Receptacle, Isolated Ground	—	2730-IG	—	2740-IG	
All Black Flush Mount Locking Receptacle	—	2730-B	—	—	



2733



2736